

BLACKTOP PATCH

Ready To Use Blend
of Asphalt and Aggregates

REPAIR
ASPHALT

MANUFACTURER:

Ace-Crete Products, Inc.
4 Rita Street • Syosset, NY 11791
(516) 921-9595 • Fax (516) 921-9575

PRODUCT DESCRIPTION:

ACE-CRETE BLACKTOP PATCH is a single component product, consisting of asphalts and graded aggregates, scientifically blended and then packaged at our manufacturing facility in Bayville, New Jersey.

USES:

- Potholes
- Driveways
- Walkways
- Parking areas

ADVANTAGES:

- Ready to use
- Self-curing

INSTALLATION:

Surface Preparation:


Clean area to be patched by sweeping with a stiff broom or brush. Area to be patched must be free of all loose particles or deteriorated material. Be sure the material surrounding and forming the hole to be patched is sound.

Placement:

Place *ACE-CRETE BLACKTOP PATCH* directly into the area to be patched. Spread to a level 1" higher than the surrounding area and tamp into place with a hand tamper, roller, back of

Packaging:

Available in 60 pound multi-wall paper bags with moisture barrier.

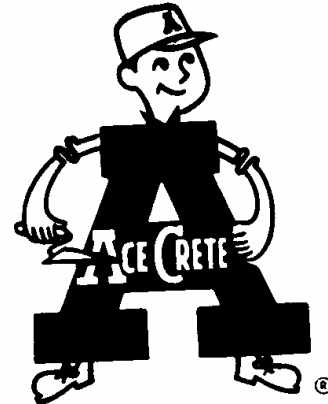

shovel, or place a board over the patch and drive a vehicle back and forth over the board. The better the patch is compacted, the more long lasting it will be.

Mixing:

No mixing is required. *ACE-CRETE BLACKTOP PATCH* is ready to use as shipped. Following prolonged storage, *ACE-CRETE BLACKTOP PATCH* may feel stiff in the bag. This condition is normal and will not adversely affect the mix. In cold weather, keep the material in a warm area for at least 24 hours prior to use.

Curing:

ACE-CRETE BLACKTOP PATCH cures through an evaporation process. Complete curing may take from 30-90 days, depending on weather conditions prior to and after placement. If the surface is undesirably tacky after patching, sweep dry sand over the patch.

Coverage:

A 60 pound bag will yield approximately $\frac{2}{5}$ (0.4) cubic foot compacted volume with approximate coverage of 5 square feet 1 inch thick.

Color:

Asphalt black

TECHNICAL DATA:

ACE-CRETE BLACKTOP PATCH is prepared from aggregate which complies with the open graded #10 size requirements of ASTM D-448, Standard Classification for Sizes of Aggregate for Road and Bridge Construction.

LIMITATIONS:

Cold patch such as this is intended for use in filling potholes or wide cracks. The material must be confined within the shape of these depressions in order to achieve compaction and desired hardness. It does not replace a bituminous hot mix.

CAUTION:

This mix contains petroleum asphalt. As with any petroleum based material, direct contact may irritate eyes and skin. Wear protective clothing, gloves and eye protection when using this product. If any material gets into the eyes, rinse immediately and contact a physician. Wash exposed skin areas promptly with water. Do not take internally. **Keep Out Of Reach Of Children.**

WARRANTY:

Due to the use of this product beyond our control, we assume no liability for damages of any kind, and the user accepts the product "as is" and without warranties, expressed or implied, from either Ace-Crete Products or its agents. The suitability of the product for an intended use shall be solely up to the user. Our only obligation shall be to replace or pay for any material proved defective, with our liability limited to the purchase price of materials supplied by us.